



# SUBMITTAL : ECO-MTBRK-B2L Heat Pump Mounting Bracket



Job Name \_\_\_\_\_  
 Purchaser \_\_\_\_\_  
 Submitted to \_\_\_\_\_  
 Unit Designation \_\_\_\_\_

Location \_\_\_\_\_  
 Engineer \_\_\_\_\_  
 Reference  Approval  Construction   
 Schedule # \_\_\_\_\_

Specifications	ECO-MTBRK-B2L
<b>Physical Data</b>	
Material	16 GA Steel
Maximum Mounting Width	37 3/4"
Mounting Arm Length	20 7/8"
Weight	9.2lbs
<b>Mounting</b>	
Max Mounting Weight (per Arm)	176lbs

### Construction


Mounting Bracket shall be constructed from 16 GA steel with a baked on powder coating for corrosion resistance

### Installation

Mounting Bracket shall consist of a cross bar that is attached to the building wall and two (2) L shaped brackets that are hooked and bolted on the cross bar. L shaped arms shall be spaced apart to match width of SANCO<sub>2</sub> mounting feet. SANCO<sub>2</sub> unit shall be fastened to the Mounting Bracket using the bolts and anti-vibration washers provided.

### Application

Mounting Bracket shall allow the SANCO<sub>2</sub> unit to be mounted on a wall or structure as required by the building type.

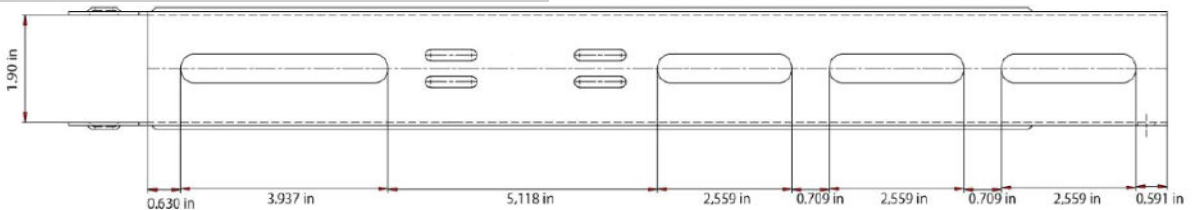

**Arm Slot Detail**

