



SUBMITTAL : GS5-45HPC & ECO-119SSAQB 119 Gallon Tank



Job Name	Location
Purchaser	Engineer
Submitted to	Reference ☐ Approval ☐ Construction ☐
Unit Designation	Schedule #

Specifications	GS5-45HPC
Performance	
Uniform Energy Factor	3.88
Uniform First Hour Rating	162 Gallons
Nom Heating Capacity (Btu/h)	15,400 Btu/h
Nom Heating Capacity (kw)	4.5kw
Heating COP @ 80/47/17°F	5.5 / 4.2 / 2.8
Water Temperature Setting (°F)	145 or 150 DegF
Refrigerant Type	R744 (CO ₂)
Refrigerant Charge (Oz)	25.4oz (720g)
Power Voltage	208/230v-1Ph-60Hz
Breaker Size	15A
MCA (Amps)	7.2A
Compressor MRC (Amps)	5.0A
Fan Motor MOC/Watts	0.3A / 30W
Pump MOC/Watts	0.6A / 60W
Noise Level (DbA)	37
Weight (lbs)	108lbs
Storage Tank	ECO-119SSAQB
Nominal Volume	117 Gallons
Pressure Relief Valve (Psig & °F)	150 & 210°F
Temperature Sensor	Thermistor
Tank Weight (lbs)	134lbs
Standby Loss in 67°F Ambient	110 Btu/h
Tank Connection Sizes	
Cold Water Inlet	1 1/2" NPT
Hot Water Outlet	1 1/2" NPT
Cold Water to Heat Pump	3/4" NPT
Hot Water Return from HP	3/4" NPT
Pipe Size - Tank to Heat Pump	
Cold Water pipe - Tank to HP	1/2"
Hot Water pipe - HP to Tank	1/2"
Max Pipe Length inc	66ft
Max Vertical Separation of	23ft
Certifications	
Safety	ETL & ETLc
Performance	Energy Star
Warranty - System	3 Years Labor
Heat Pump	10 Years Parts
Tank	10 Years

Construction

The Outdoor unit shall be galvanized steel with a baked on powder coated finish on all panels except for unit base

Heat Exchangers

Evaporator coil shall be mechanically bonded Aluminum fin to copper tube. Fins shall be coated to resist corrosion

The Refrigerant to Water HX (Gas Cooler) shall be a Double Wall type pressure tested to 6000 psi

Refrigerant System

Compressor shall be a hermetically sealed DC

Inverter drive Rotary vane type

Refrigerant shall be R744 (CO₂).

Refrigerant flow shall be controlled by EEV

Fan & Motor

The outdoor unit fan shall be a propeller type, driven by a BLDC Motor

Water Pump

The pump shall be a BLDC Impellor type

Controls

The unit shall be operated using a temperature sensor mounted in the Storage tank

Control wiring shall require 18-2AWG shielded wire

Ambient operating range shall be -25°F to 114°F

A Modbus communication signal shall be accepted by the GS5 Heat Pump via the ECO-RDR Controller that shall be available from ECO2 Systems as an accessory

Storage Tank - Indoor Installation only

Storage tank shall be constructed from mild steel

with a baked on Colbalt enriched porcelain lining

Storage Tank connections shall be NPT. Storage

Tank shall be supplied with Mixing Valve & PTR Valve

Interconnect Piping

Interconnect Piping shall be 1/2" copper or where permitted 1/2" PEX tubing

Both Cold and Hot piping should be insulated with min 3/4" closed cell foam and where required Heat Trace tape shall be used to prevent pipes from freezing




SUBMITTAL : GS5-45HPC & ECO-119SSAQB 119 Gallon Tank



Job Name	Location			
Purchaser	Engineer			
Submitted to	Reference	☐	Approval	☐
Unit Designation	Schedule #	☐	Construction	☐

GS5-45HPC Dimensions

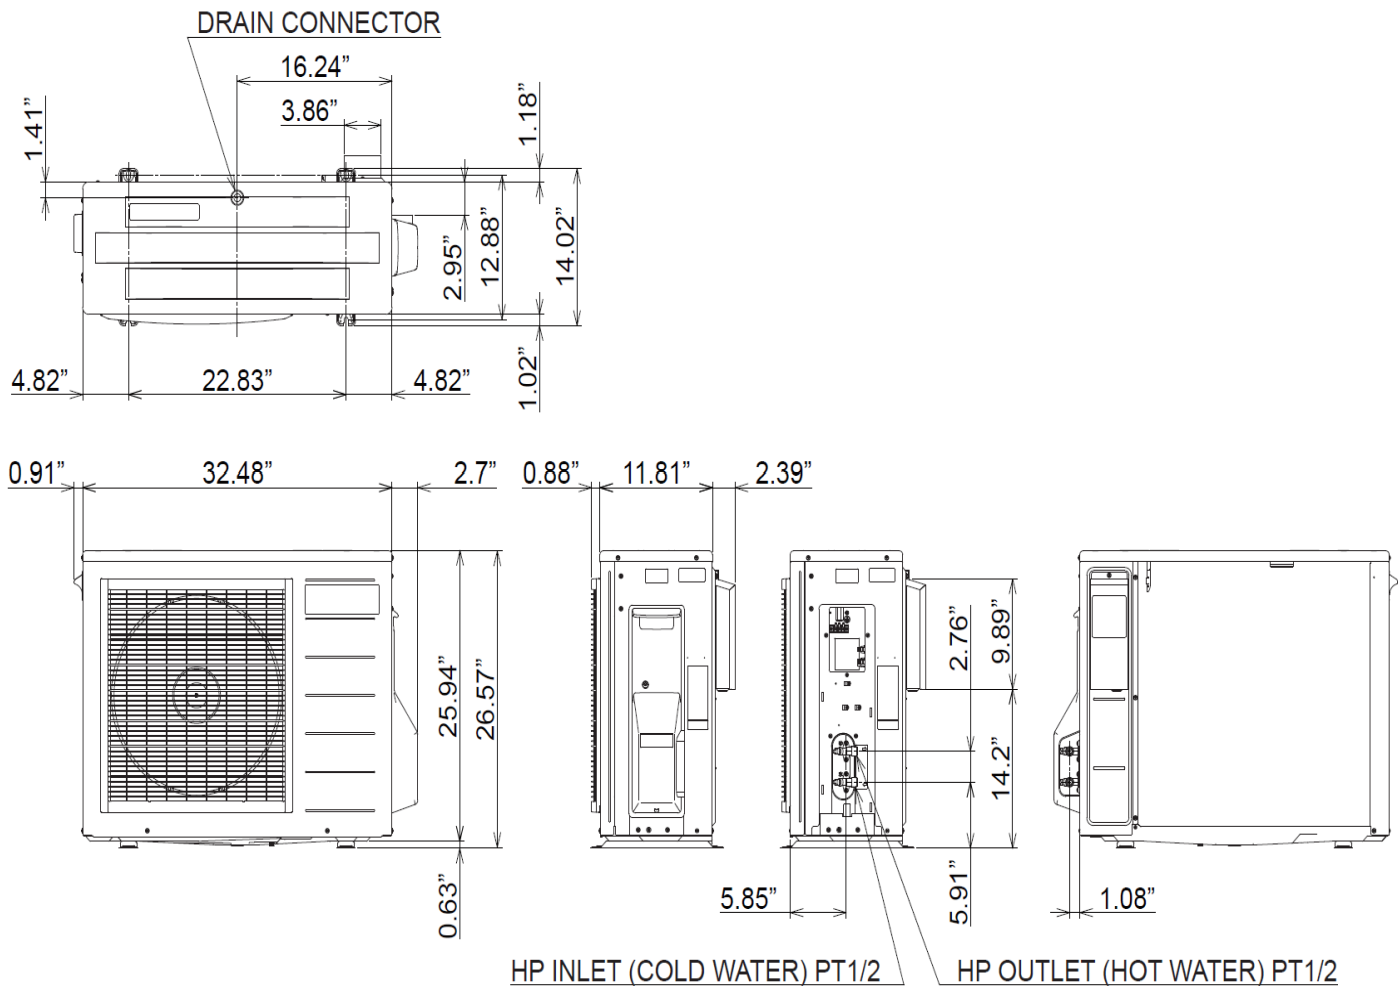

Unit:inch



SUBMITTAL : GS5-45HPC &
ECO-119SSAQB 119 Gallon Tank



Job Name	Location
Purchaser	Engineer
Submitted to	Reference ☐ Approval ☐ Construction ☐
Unit Designation	Schedule #

ECO-119SSAQB Dimensions

Height	73"
Diameter	29"
Cold Water In	11 1/4"
Cold Water to GS5	11"
Hot Water from GS5	61"
Hot Water Out	60 7/8"

